#68 Turnbuckle

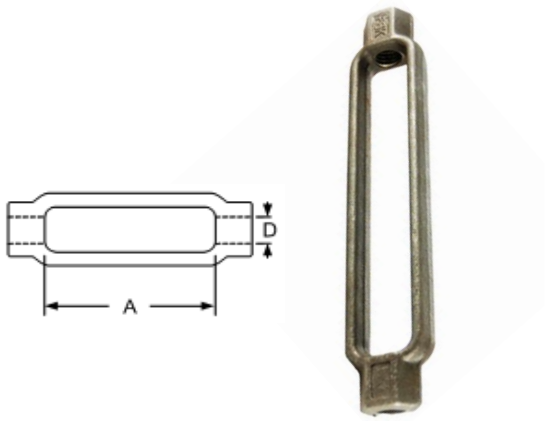

Finishes Bare Metal, Hot Dipped Galvanized

Materials Carbon Steel, Stainless Steel 316SS

Approvals Complies with MSS SP-58 and SP-69 (Type 13).

Recommended Designed as an adjustable hanger rod connection.

Notes Tapped right hand and left hand thread.
Larger rod size available upon request.
Different openings available upon request.

*Hot Dipped Galvanized standard tap and oversized tap available, please specify when ordering

ROD SIZE D	SPECIFICATION DATA		APPROX. WT per 100 6" Opening
	A	RECOM. MAX. LOAD (LBS) @ 650° F	
3/8	6	730	42
1/2	6	1350	65
5/8	6	2160	98
3/4	6	3230	145
7/8	6	4480	185
1	6	5900	260
1 1/4	6	9500	445
1 1/2	6	13800	640
1 3/4	6	18600	1100
2	6	24600	1490
2 1/4	6	32300	1960
2 1/2	6	39800	2690

QWI 4.3.1 Issue Date Nov/21 Rev.9

Note: when referencing a printed copy of this specification page, please insure it is the latest version as found on our website at www.taylorwalraven.ca

For more information, please contact Customer Service at 1-800-263-8652